



MANUAL

Installation manual

TaHoma Switch Quick App

Version: 1.6

Date: 23-09-2024



Introduction

The instruction is written for installers working with the FIBARO PRO smart home system. The document contains information about the installation procedure of the Tahoma Switch.

Requirements

1. Somfy TaHoma Switch
2. Somfy TaHoma Quick App for HC3/HC3L
3. FIBARO Home Center 3 / Home Center 3 Lite (Min. FW version 5.140)

Firmware

The Quick App has been tested with Somfy TaHoma switch firmware 1.17 and Home Center 3 (Lite) firmware 5.160.30

Device support

The Quick App supports at least the following Somfy device types.

Important:

- *If a device type is missing, please contact us for a test program to build it into the Quick App.*

NL	ENG
Luifel	Awning
Buitenscherf	Exterior Screen
Exterieur Jaloezieën	Exterior Venetian Blind
Garagedeur	Garage Door
Pergola (IO)	Pergola (IO)
Rolluik	Roller Shutter
Scherf	Screen
Jaloezie	Venetian Blind
Stekker (IO)	Plug (IO)
Raam	Window
Zon sensor (IO)	Sun sensor (IO)
Bewegingsmelder (IO)	Movement Detector (IO)
Thermis temperatuursensor (iO)	Thermis Temperature Sensor (iO)
Velux screen componenten	Velux screen components



My Button

The favorite position button in the Home Center 3 child device, is automatically assigned to the My button of the Somfy device. This also makes it possible to use the My command with the Home Center 3.

State of RTS and IO devices on the FIBARO HC3/HC3L

Somfy devices working with the RTS protocol only support 1-way communication and therefore cannot report status. This is not due to the Quick App but is a feature of the Somfy RTS protocol. The status is therefore not updated in the Home Center 3 either. You should be aware of this when creating scenes with the Home Center 3. The status of devices using the IO protocol is updated in the Home Center 3 and in the TaHoma app.



Table of Content

Requirements	2
Firmware	2
My Button	3
State of RTS and IO devices on the FIBARO HC3/HC3L	3
Somfy configuration	5
Activate the local API	5
Installatie van de TaHoma Switch Quick App	7
Configuration of the TaHoma Switch Quick App	8
Management of Somfy devices	10
Generate new token	10
Controlling Somfy devices through Yubii App, Scenes and Profiles	11
Block Scenes	11
Scenarios (Morning & Evening)	11
Profiles	11
Frequently asked questions	12

Somfy configuration

Installation of the Somfy TaHoma switch is beyond the scope of this manual. Before proceeding, ensure that the TaHoma switch box:

1. Connected to the same (Wi-Fi) network the Home Center 3 is connected to
2. The Somfy products you want to control with the HC3 are connected to the TaHoma switch
3. The Somfy products are functioning properly via the TaHoma app on your phone and/or tablet.

Tip: reserve the IP address in the router's DHCP settings.

Activate the local API

1. Go to <https://www.somfy.nl/>;
2. Click on My account;




3. Login with your Somfy Credentials
4. Under 'My products' you will see the TaHoma switch, click OPEN



5. Click the button 'Activate Development Mode'.




6. If the activation is succeeded, you'll see the developer mode is activated.

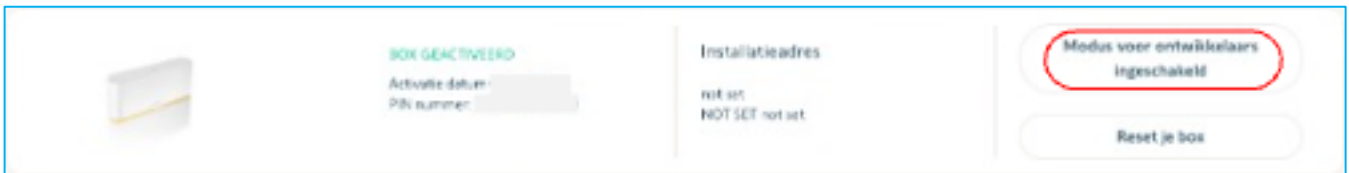

This mode activates the local API on your TaHoma box and enables the communication with your Home Center 3.

Installatie van de TaHoma Switch Quick App


1. Log in on the FIBARO Home Center 3
2. Go to Settings -> 1. Devices
3. Click the blue + sign to add a device




4. In the Add Device window, choose the 'Other Device' option



5. Select 'Upload File'

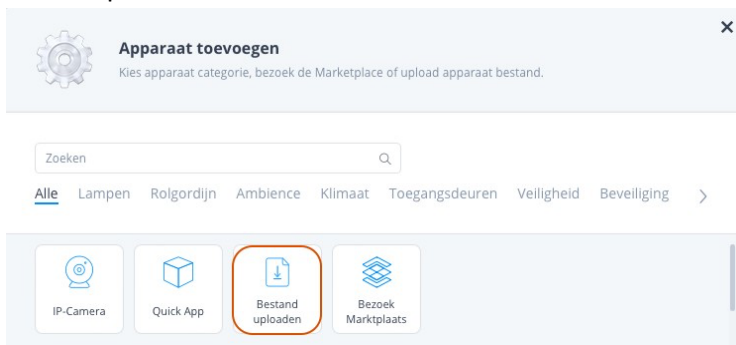

6. Open the file **Somfy_TaHoma_Switch_(xxx).fqax** that is send to you by JDK.
7. The Quick App is now installed and visible in the list of devices

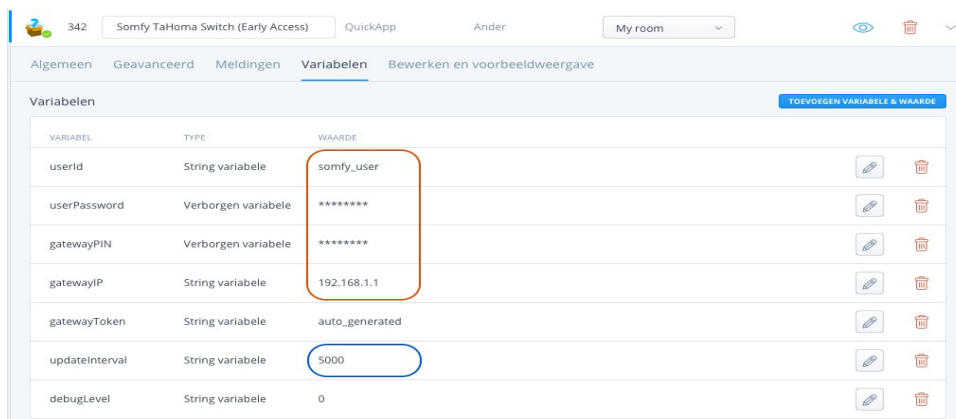



Configuration of the TaHoma Switch Quick App

1. Go to Settings -> 1. Devices
2. Click on the new Somfy Tahoma switch device
3. Select the tab Variables
4. Enter the following variables:

userId	Somfy.nl username
userPassword	Somfy.nl password
gatewayPIN	Unique PIN of TaHoma Switch, located on the bottom of the box or found on Somfy.co.uk at device.
gatewayIP	The IP address of the Tahoma Box. Tip: Reserve this address in the router's DHCP settings.
region	The region you are in for logging in to the Somfy servers (default region 1). If you live in the Asia/Oceania region (such as Australia) then enter 2 here.


5. Click the Save button to save the Quick App variables.
6. Now the Quick App will log in once to the Somfy cloud environment to generate a unique token to enable communication between your Home Center 3 and your Somfy TaHoma switch
7. Once successful, the devices available in the TaHoma switch will be added to the Home Center 3.

Other variables:

- The variable **gatewayToken** is automatically populated with a unique token after the Quick App successfully logs in to the Somfy server.
- The variable **updateInterval** defaults to 5000 milliseconds (5 seconds). You can change this yourself if necessary. Please note, if you set the update interval very short it is possible that the Home Center 3 and/or Somfy TaHoma switch will be overloaded!

Device role setting

Note: If a blind is installed, the type is not automatically set in the HC3. This must be defined yourself in the Generic options of the device:

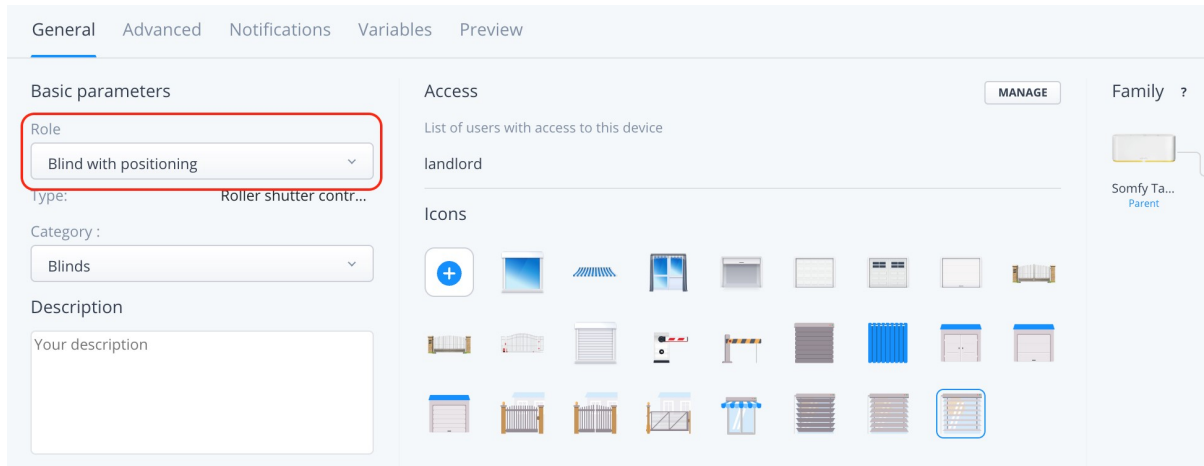

RTS Venetion Blinds label positioning

If the RTS Venetion Blinds label positioning¹ is supported, you can control the slats with the following LUA commands:

```
hub.call(deviceId,"tiltPositive", 5)
```

```
hub.call(deviceId,"tiltNegative", 5)
```

The slats tilt can be determined by adjusting the value 5. This may be a value between 1 and 15. The recommendation is to perform this in steps of 5.

IO Venetion Blinds label positioning

If the IO Venetion Blinds label positioning¹ is supported, you can control the slats with the following LUA commands:

```
hub.call(deviceId, "setSlateOrientation", 35) -- Set slates to 35%
```

¹ Tilting using the second slider in the HC3 device does not work. This is because Somfy performs this function incrementally and the HC3 works with a 0-100 value. These two control principles are not compatible with each other. This is not a bug in the Quick App.

² Feedback of the state of the slats (percentage) is not supported. This is because a Quick App in the HC3 does not support this as a roller-shutter child device. This is not a bug in the Quick App.



Discreet/low speed mode

If you own a whisper-quiet shutter motor, you can use low speed mode to make it move discreetly. For example, to open the shutter 30% with discreet mode, use a LUA scene with the following command:

```
hub.call(deviceId, "moveLowSpeed", 30)
```

Management of Somfy devices

If you add or remove Somfy devices to the TaHoma switch, you can sync them back to your Home Center 3 by clicking the button: 'Reload devices' in the Somfy Quick App.


In short, devices that no longer exist on the TaHoma switch are then automatically removed in the Home Center 3 and new devices are automatically added.

Please note that when replacing defective Somfy products, in existing scenes, change the id of the old device to the id of the new device!

Generate new token

In the unlikely event of a problem with the Somfy token, you can easily generate a new token by clicking the Generate new token button in the Somfy Quick App.

The old token is then automatically deleted on the Somfy cloud server and the TaHoma switch.

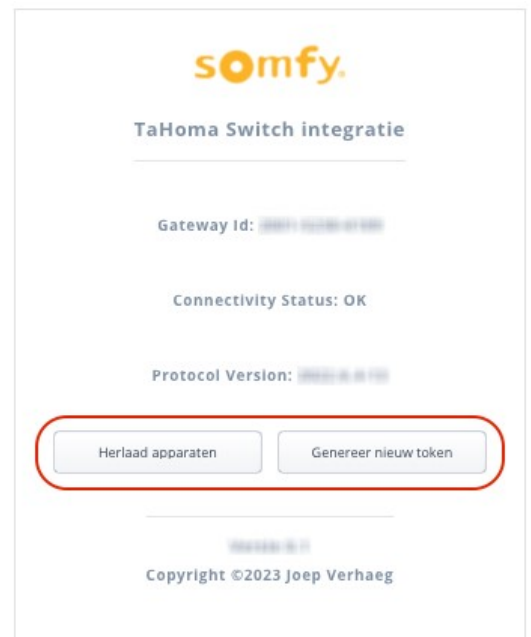




Controlling Somfy devices through Yubii App, Scenes and Profiles


Block Scenes

The motor can be controlled via scenes with the following actions: level, open, close, stop and favorite position. Thereby, the level can only be operated if the motor feedback the status to the Tahoma Switch.

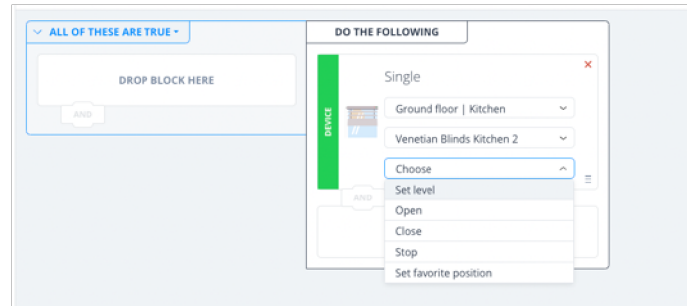

Scenarios (Morning & Evening)


The blinds are assigned as a 'Roller Shutter' in the system. This means you can include the motor in the simple scenarios. The scenarios are designed to open/close blinds based on a specific time. Moreover, the scenarios can be customized via the Yubii App.

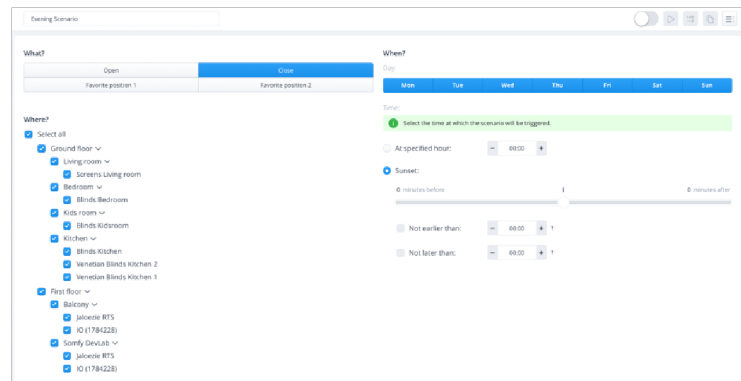

Profiles

The status of the blinds can be set via the Profiles. This makes it easy to close all blinds when you are absent.

When you are present, you can then open the blinds again. Setting the trigger for a profile can be done via the scenes or manually via the Yubii App.

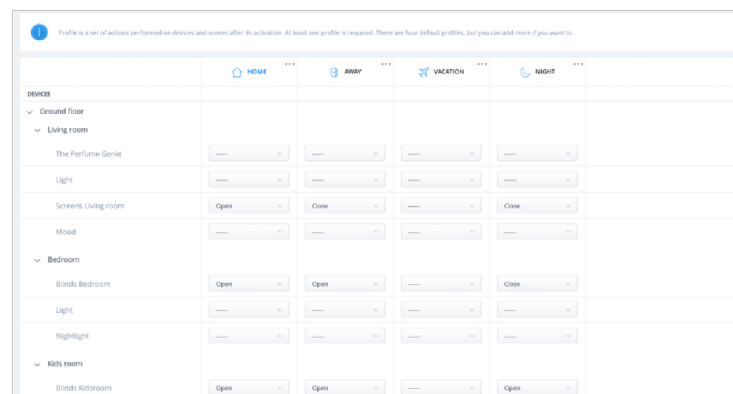



Frequently asked questions

Can I also control Somfy motors without the Tahoma Switch with the FIBARO HC3/HC3L?

Somfy motors can only be operated without a Tahoma Switch if the motor is not equipped with RF, for example RTS and IO. If the motor uses one of these protocols, you cannot operate the motor without a Tahoma switch.

Why doesn't the slider of the blind work like with a Roller Shutter 3?

Tilting using the second slider in the HC3 device does not work. This is because Somfy performs this function incrementally and the HC3 works with a 0-100 value. These two control principles are not compatible with each other. This is not a bug in the Quick App.

Can I control the Somfy motor via a Z-Wave switch or remote control?

Yes, you can control the position of the motor with scene activation of a Z-Wave switch or remote control. For example: with 1x press close the motor, 2x press open the motor, 3x press to favorite position.

Can I operate and position the Somfy motor via a Z-Wave switch or remote control?

No, this is not possible. With Z-Wave actors, we can interconnect the modules using associations. With IP integration, this is not possible.

Can the Quick App also read the status of the Somfy motor?

Somfy devices working with the RTS protocol only support 1-way communication and therefore cannot report status. This is not due to the Quick App but is a feature of the Somfy RTS protocol. The status is therefore not updated in the Home Center 3 either. You should be aware of this when creating scenes with the Home Center 3. The status of devices using the IO protocol is updated in the Home Center 3 and in the Tahoma app.

My device is not recognized, what now?

If a device type is missing, contact us for a test program to build it into the Quick App.